1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104 An MALION Technical Center

RIVERBANK.ALIONSCIENCE.COM FOUNDED 1918 BY WALLACE CLEMENT SABINE

Test Report

SPONSOR: Solitrade

Charlotte, NC

Impact Sound Transmission RALTM-IFC19-003

CONDUCTED: 2019-02-15

Page 1 of 10

ON: Porcelain tile and mortar floor with SoliBlock Floor HP underlayment

TEST METHODOLOGY

Riverbank Acoustical Laboratories has been accredited by the U.S. Department of Commerce, National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP) as an ISO 17025:2005 Laboratory (NVLAP Lab Code: 100227-0) and for this test procedure. The test reported in this document conformed explicitly with ASTM E2179-03 (2009): "Standard Test Method for Laboratory Measurement of the Effectiveness of Floor Coverings in Reducing Impact Sound Transmission Through Concrete Floors" The single number rating was calculated according to ASTM E989-18: "Standard Classification for Determination of Single-Number Metrics for Impact Noise." A complete description of the measurement procedure and room specifications are available upon request. The results presented in this report apply to the sample material as received from the test sponsor.

STANDARD CONCRETE FLOOR

The laboratory's standard concrete floor is a fully cured 152.40 mm (6.0 in.) thick concrete floor installed directly in the laboratory's 4.27 m (14.0 ft.) by 2.44 m (8 ft.) test opening. No additional ceiling materials were installed over the bottom face of the concrete.

Concrete Slab

Material: Wire-reinforced concrete

Dimensions: 4 @ 609.6 mm (24 in.) x 4267.2 mm (168 in.)

Thickness: 152.4 mm (6 in.)

Overall Weight: 3474.74 kg (7660.5 lbs)

Mass per Unit Area: 333.94 kg/m² (68.40 lbs/ft²)

Joints: Underside sealed with acoustical caulk and tape

Top filled with general purpose sand, sealed with ready mix compound

Note: A 0.08 mm (0.003 in.) thick polyethylene sheet was adhered with spray adhesive to the top face of the concrete slab in order to protect the slab surface.



® RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2005 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104 An MALION Technical Center

RIVERBANK.ALIONSCIENCE.COM FOUNDED 1918 BY WALLACE CLEMENT SABINE

Test Report

 Solitrade
 RALTM-IFC19-003

 2019-02-15
 Page 2 of 10

SPECIMEN MEASUREMENTS & TEST CONDITIONS

The test specimen was designated by the sponsor as Porcelain tile and mortar floor with SoliBlock Floor HP underlayment. The building contractor and RAL staff compiled a detailed construction specification for the test specimen as follows, in order of installation:

Adhesive

Trade Name: Roberts 2057

Material: Vinyl composition tile adhesive

Application Tool: 1.59 mm (0.0625 in.) x 1.59 mm (0.0625 in.) x 0.79 mm (0.03125 in.) trowel

Wet Weight: 3.18 kg (7 lbs)

Installation: Spread in a thin layer over polyethylene sheet

Underlayment

Trade Name: SoliBlock Floor HP

Dimensions: 2438.4 mm (96 in.) x 4267.2 mm (168 in.) as installed

Overall Thickness: 3 mm (0.118 in.) Overall Weight: 5.33 kg (11.75 lbs) Mass per Unit Area: 0.51 kg/m² (0.10 lbs/ft²)

Installation: Laid over adhesive, rolled with 40.82 kg (90 lbs) flooring roller

Mortar

Trade Name: Mapei UltraflexTM 2

Material: Polymer-modified thin-set mortar

Application Tool: 6.35 mm (0.25 in.) x 9.52 mm (0.375 in.) x 6.35 mm (0.25 in.) trowel

Thickness: Approximately 6.35 mm (0.25 in.) as installed Mix Ratio: 2.57 L water per 11.34 kg (25 lbs) dry mix

Wet Weight: 56.36 kg (124.25 lbs)

Installation: Troweled over underlayment

Trowel lines parallel to length of concrete slab

Tile

Trade Name: Daltile LV02 12121HDIP6

Material: Porcelain

Dimensions: 304.8 mm (12 in.) x 304.8 mm (12 in.)

Thickness: 7.94 mm (0.3125 in.) Overall Weight: 164.65 kg (363 lbs)

Installation: Laid over mortar, spaced 6.35 mm (0.25 in.) apart

Installation Date: 2019-02-12



® RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2005 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104 An MALION Technical Center

RIVERBANK.ALIONSCIENCE.COM FOUNDED 1918 BY WALLACE CLEMENT SABINE

Test Report

Solitrade 2019-02-15

RALTM-IFC19-003
Page 3 of 10

Grout

Trade Name: Mapei FlexcolorTM CQ Wet Weight: 5.1 kg (11.25 lbs)

Installation: Pressed into space between tiles

Installation Date: 2019-02-13

Overall Specimen Properties

Size: 2.44 m (96.0 in) wide by 4.27 m (168.0 in) long

Thickness: 0.17 m (6.6 in)

Weight: 234.62 kg (517.25 lbs)

Transmission Area: 10.405 m² (112 ft²)

Mass per Unit Area: 22.55 kg/m² (4.62 lbs/ft²)

Test Aperture

Size: 4.27 m (14.0 ft.) by 2.44 m (8 ft.)

Filler Wall: None

Sealed: Entire periphery (both sides) with dense mastic

Test Environment

Source Room

Volume: 131.32 m³

Temperature: $22.2 \, ^{\circ}\text{C} \pm 0.0 \, ^{\circ}\text{C}$ Relative Humidity: $49.5 \, \% \pm 1.0 \, \%$

Receive Room

Volume: 82.64 m³

Temperature: $22.8 \,^{\circ}\text{C} \pm 0.0 \,^{\circ}\text{C}$ Relative Humidity: $49.5 \,^{\circ}\text{M} \pm 1.0 \,^{\circ}\text{M}$

TESTING

NVLAP LAB CODE 100227-0

® RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2005 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104 An MALION Technical Center

Test Report

RIVERBANK.ALIONSCIENCE.COM FOUNDED 1918 BY WALLACE CLEMENT SABINE

RALTM-IFC19-003

Page 4 of 10

Solitrade 2019-02-15



Figure 1 – Completed specimen mounted in test aperture, as viewed from source room.



Figure 2 – Completed specimen mounted in test aperture, as viewed from receive room.



® RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2005 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104 An MALION Technical Center

Test Report

RIVERBANK.ALIONSCIENCE.COM FOUNDED 1918 BY WALLACE CLEMENT SABINE

> RALTM-IFC19-003 Page 5 of 10

Solitrade 2019-02-15



Figure 3 – Adhesive installed on polyethylene sheet over concrete slab



Figure 4 – Underlayment installed, floor roller used in installation



® RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2005 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104 An MALION Technical Center

Test Report

RIVERBANK.ALIONSCIENCE.COM FOUNDED 1918 BY WALLACE CLEMENT SABINE

RALTM-IFC19-003

Page 6 of 10





Figure 5 – Detail of underlayment material



Figure 6 – Mortar and tile partially installed over underlayment



® RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2005 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104 An MALION Technical Center

RIVERBANK.ALIONSCIENCE.COM FOUNDED 1918 BY WALLACE CLEMENT SABINE

Test Report

RALTM-IFC19-003

Page 7 of 10

Solitrade 2019-02-15

TEST RESULTS

1/3 Octave Center Frequency (Hz)	Normalized Impact SPL, Lo, Bare Standard Concrete Floor (dB)	Normalized Impact SPL, Lc, Floor Covering Installed (dB)	$eq:continuous_continuous$	Impact SPL of Floor Covering on a Reference Concrete Slab, $L_{\text{ ref, c}}, \eqno(dB)$	
100	55	55	0	67.0	
125	59	56	3	64.5	
160	61	60	1	67.0	
200	63	60	3	65.5	
250	67	66	1	68.0	
315	70	69	1	68.5	
313	70	09	1	08.3	
400	71	71	0	70.0	
500	69	69	0	70.5	
630	69	64	5	66.0	
800	70	60	10	61.5	
1000	69	53	16	56.0	
1250	69	50	19	53.0	
1600	74	49	25	47.0	
2000	71	43	28	44.0	
2500	71	40	31	41.0	
3150	72	37	35	37.0	

Increase in Impact Insulation Class $\Delta IIC = 19$

Impact Insulation Class, IIC $_c$ for L $_{ref, c}$ IIC $_c = 47$



® RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2005 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104 An MALION Technical Center

Test Report

RIVERBANK.ALIONSCIENCE.COM FOUNDED 1918 BY WALLACE CLEMENT SABINE

Solitrade 2019-02-15

RALTM-IFC19-003

Page 8 of 10

TEST RESULTS (Continued)

The measured impact sound pressure levels (ISPL) are tabulated in each of the twenty-one standard one third octave bands from 100 Hz through 3150 Hz for both the standard concrete slab and the three sample materials. The reduction in ISPL calculated for the floor covering has been applied to a reference concrete floor with an IIC = 28 as described in the standard. The increase in impact insulation class, Δ IIC as well as the IIC_c for the floor covering on a reference concrete slab has also been calculated. An * indicates that the value has been adjusted for background noise levels and reflects a lower limit. A graphic presentation of the data appears on the following page.

Tested by_

Marc Sciaky

Senior Experimentalist

Report by_

Malcolm Kelly

Test Engineer, Acoustician

Approved by

Eric P. Wolfram

Laboratory Manager

1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104 An MALION Technical Center

RIVERBANK.ALIONSCIENCE.COM FOUNDED 1918 BY WALLACE CLEMENT SABINE


Test Report

RALTM-IFC19-003
Page 9 of 10

Solitrade 2019-02-15

Floor Covering Impact Reduction

Porcelain tile and mortar floor with SoliBlock Floor HP underlayment

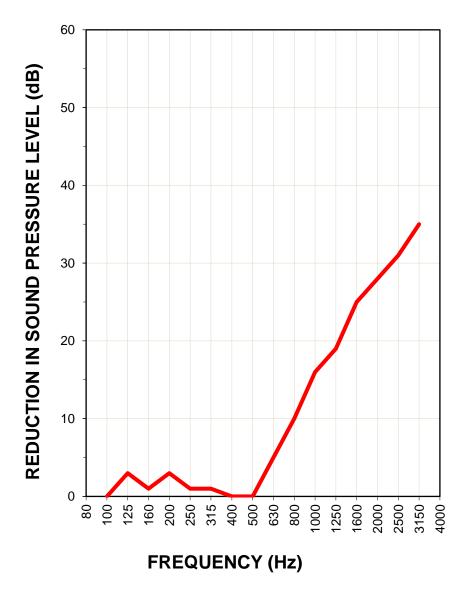

ΔIIC=19

IMPACT REDUCTION OF FLOOR COVERING ON A CONCRETE FLOOR



® RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2005 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104 An MALION Technical Center

RIVERBANK.ALIONSCIENCE.COM FOUNDED 1918 BY WALLACE CLEMENT SABINE

Test Report

RALTM-IFC19-003
Page 10 of 10

Solitrade 2019-02-15

APPENDIX A: Instruments of Traceability

Specimen: Porcelain tile and mortar floor with SoliBlock Floor HP underlayment (See Full Report)

		Serial	Date of	Calibration
<u>Description</u>	Model	<u>Number</u>	Certification	<u>Due</u>
System 2	Type 3160-A-042	3160- 106974	2018-08-09	2019-08-09
Bruel & Kjaer Mic And Preamp D	Type 4943-B-001	2311440	2018-09-28	2019-09-28
Wood Case Tapping Machine	Type 3204	226940	2018-08-23	2019-08-23
Bruel & Kjaer Pistonphone	Type 4228	2781248	2018-08-06	2019-08-06
EXTECH Hygro 330	SD700	A083330	2018-09-07	2019-09-07
EXTECH Hygro 322	SD700	A083322	2018-09-07	2019-09-07

APPENDIX B: Revisions to Original Test Report

Specimen: Porcelain tile and mortar floor with SoliBlock Floor HP underlayment (See Full Report)

<u>Date</u>	Revision	
2019-02-20	Original report issued	
2019-08-30	Page 1-7: The original manufacturer/requester identification and specim designation were changed to facilitate a private label sales agreement. To original requester has provided a letter to RAL on their company letterh certifying that the product identified has not changed in materials, composition, or manufacturing methods since the original test date and product sold under the private label agreement is exactly identical to the original specimen described in the test report and sourced from the same manufacturing processEPW	

END



® RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2005 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.