1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104 An MALION Technical Center

Test Report

RIVERBANK.ALIONSCIENCE.COM FOUNDED 1918 BY WALLACE CLEMENT SABINE

Sound Transmission Loss RAL-TL18-392

CONDUCTED: 2018-06-18 Page 1 of 9

ON: Steel stud gypsum board wall, SoliBlock Wall HP+ on source side

TEST METHOD

FOR: **Solitrade**

Charlotte, NC

Riverbank Acoustical LaboratoriesTM is accredited by the U.S. Department of Commerce, National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP) as an ISO 17025:2005 Laboratory (NVLAP Lab Code: 100227-0) and for this test procedure. The test reported in this document conformed explicitly with ASTM E90-09 (2016): "Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements." The single number rating of the specimen was calculated according to ASTM E413-16: "Classification for Rating Sound Insulation." A description of the measuring procedure and room qualifications is available upon request. The transmission loss values are for a single direction of measurement. The product designation used in this report was provided to RAL by the sponsor and attributed to the specimen under test.

DESCRIPTION OF THE SPECIMEN

The test specimen was designated by the manufacturer as Steel stud gypsum board wall, SoliBlock Wall HP+ on source side. A full internal inspection performed on the test specimen by Riverbank personnel verified the manufacturer's description.

The building contractor and RAL staff compiled a detailed construction specification as follows:

Plates/Base Track

Material: Clark Dietrich 25 ga EQ steel track

Dimensions: 2 @ 2438.4 mm (96 in.) long x 31.75 mm (1.25 in.) high x 92.07

mm (3.625 in.) deep

Installation: Friction fit to test frame over foam sill sealer

Overall Weight: 2.15 kg (4.75 lbs)

Mass per Unit Length: 0.44 kg/m (0.30 lb/ft)

Studs

Material: Clark Dietrich 25 ga EQ steel studs

Dimensions: 5 @ 2743.2 mm (108 in.) long x 31.75 mm (1.25 in.) wide x 92.07

mm (3.625 in.) deep

Stud Spacing: 609.6 mm (24 in.) on center

Installation: Crimped at top and bottom to tracks

Side studs screwed to test frame at midpoint, one screw per side

Fasteners: Type W bugle head drywall screw, 31.75 mm (1.25 in.) length

Overall Weight: 7.14 kg (15.75 lbs)

Mass per Unit Length: 0.52 kg/m (0.35 lb/ft)

Note: A 6.35 mm (0.25 in.) bead of sealant was applied around both sides of the perimeter where framing members contact the test frame (0.91 kg (2 lbs) total).



® RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2005 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104 An MALION Technical Center

Test Report

RIVERBANK.ALIONSCIENCE.COM FOUNDED 1918 BY WALLACE CLEMENT SABINE

Page 2 of 9

Solitrade 2018-06-18

Source Side

Layer 1

Material: SoliBlock Wall HP+ (barrier sheet)

Dimensions: 2 @ 1219.2 mm (48 in.) x 2743.2 mm (108 in.)

Thickness: 3.18 mm (0.125 in.)

Installation: Screwed to studs, six screws per sheet

Center seam treated with duct tape

Fasteners: #8 wafer head stud screws

Overall Weight: 19.96 kg (44 lbs)

Mass per Unit Area: Nominal @ 2.93 kg/m² (0.6 lb/ft²)

Measured @ 2.98 kg/m² (0.61 lb/ft²)

Layer 2

Material: Type X gypsum board

Dimensions: 1 @ 1219.2 mm (48 in.) x 2743.2 mm (108 in.)

2 @ 609.6 mm (24 in.) x 2743.2 mm (108 in.)

Thickness: 15.88 mm (0.625 in.)

Installation: Screwed through Layer 1 to studs

Fasteners: Type S bugle head drywall screws, 31.75 mm (1.25 in.) length

Fastener Spacing: 406.4 mm (16 in.) on center, perimeter and field

Overall Weight: 73.03 kg (161 lbs)

Mass per Unit Area: $10.92 \text{ kg/m}^2 (2.24 \text{ lb/ft}^2)$

Cavity

Material: R-13 unfaced fiberglass insulation

Installation: Friction fit into stud cavities

Overall Weight: 7.71 kg (17 lbs)

Density: 12.97 kg/m³ (0.81 lb/ft³)

Receive Side

Material: Type X gypsum board

Dimensions: 2 @ 1219.2 mm (48 in.) x 2743.2 mm (108 in.)

Thickness: 15.88 mm (0.625 in.) Installation: Screwed to studs

Fasteners: Type S bugle head drywall screws, 31.75 mm (1.25 in.) length

Fastener Spacing: 406.4 mm (16 in.) on center, perimeter and field

Overall Weight: 72.69 kg (160.25 lbs)
Mass per Unit Area: 10.87 kg/m² (2.23 lb/ft²)

Note: A thin layer of sealant and metal tape was applied to joints and screw heads on both sides of the partition (0.45 kg (1 lbs) total).



® RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2005 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104

An MALION Technical Center

Test Report

RIVERBANK.ALIONSCIENCE.COM FOUNDED 1918 BY WALLACE CLEMENT SABINE

> RAL-TL18-392 Page 3 of 9

Solitrade 2018-06-18

Physical Measures

Overall Dimensions: 2.44 m (96.00 in.) wide by 2.74 m (108.00 in.) high

Overall Thickness: 127.00 mm (5.00 in.)
Overall Weight: 184.05 kg (405.75 lbs.)
Transmission Area: 6.69 m² (72.00 ft²)

Mass per Unit Area: $27.54 \text{ kg/m}^2 (5.64 \text{ lbs./ft}^2)$

Test Aperture

Size: 2.74 m (9.0 ft.) by 4.27 m (14.0 ft.)

Filler Wall: Yes

Sealed: Entire periphery (both sides) with dense mastic

Test Environment

Source Room

Volume: $177.1 \text{ m}^3 (6254.5 \text{ ft}^3)$ Temperature: $23\pm0^{\circ}\text{C} (74\pm0^{\circ}\text{F})$

Humidity: 55±0%

Receive Room

Volume: 178.3 m³ (6297.6 ft³) Temperature: 22±0°C (72±0°F)

Humidity: 55±0%

Requirements

Temperature: 22° C +/- 2° C, not more than 3° C change over all tests. Humidity: $\geq 30\%$ RH, not more than +/- 3% change over all tests.



1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104 An MALION Technical Center

Test Report

RIVERBANK.ALIONSCIENCE.COM FOUNDED 1918 BY WALLACE CLEMENT SABINE

Page 4 of 9

Solitrade 2018-06-18



Figure 1 – Completed specimen mounted in test opening, as viewed from source room

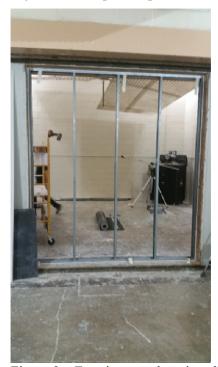


Figure 2 – Framing members installed



® RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2005 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104

Solitrade 2018-06-18

An MALION Technical Center

Test Report

RIVERBANK.ALIONSCIENCE.COM FOUNDED 1918 BY WALLACE CLEMENT SABINE

Page 5 of 9



Figure 3 – Mass-loaded vinyl layer installed



Figure 4 – Stud cavity insulation installed, receive side gypsum board partially installed



® RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2005 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104

RIVERBANK.ALIONSCIENCE.COM FOUNDED 1918 BY WALLACE CLEMENT SABINE

Test Report

An MALION Technical Center

RAL-TL18-392 Page 6 of 9

Solitrade 2018-06-18

TEST RESULTS

Sound transmission loss values are tabulated at the eighteen standard frequencies. A graphic presentation of the data and additional information appear on the following pages. The precision of the transmission loss test data is within the limits set by the ASTM Standard E90-09 (2016).

FREQ.	<u>T.L.</u>	<u>C.L.</u>	DEF.		FREQ.	<u>T.L.</u>	<u>C.L.</u>	DEF.
				_				
100	20	0.71			800	57	0.13	
125	32	0.68	7		1000	60	0.14	
160	37	0.50	5		1250	61	0.18	
200	41	0.39	4		1600	60	0.12	
250	46	0.40	2		2000	56	0.09	3
315	49	0.19	2		2500	55	0.10	4
400 500	52 53	0.27 0.16	2 2		3150 4000	59 61	0.11 0.09	
630	55	0.22	1		5000	62	0.09	

STC=55

ABBREVIATION INDEX

FREQ. = FREQUENCY, HERTZ, (cps)

T.L. = TRANSMISSION LOSS, dB

C.L. = SAMPLING PRECISION DURING TEST IN dB, FOR A 95% CONFIDENCE LIMIT

DEF. = DEFICIENCIES, dB<STC CONTOUR (SUM OF DEF = 32)

STC = SOUND TRANSMISSION CLASS

Tested by____

Report by_

Malcolm Kelly

Acoustician

Dean Victor

Senior Experimentalist

Approved by

Eric P. Wolfram

Laboratory Manager



® RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2005 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104 An MALION Technical Center

Test Report


RIVERBANK.ALIONSCIENCE.COM FOUNDED 1918 BY WALLACE CLEMENT SABINE

RAL-TL18-392 Page 7 of 9

Solitrade 2018-06-18

SOUND TRANSMISSION REPORT

Steel stud gypsum board wall, SoliBlock Wall HP+ on source side

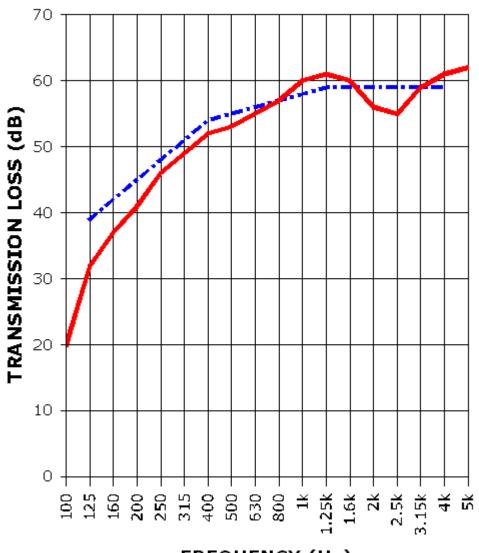

FREQUENCY (Hz)

STC=55

TRANSMISSION LOSS
SOUND TRANSMISSION LOSS CONTOUR



® RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2005 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104

RIVERBANK.ALIONSCIENCE.COM FOUNDED 1918 BY WALLACE CLEMENT SABINE

Test Report

An MALION Technical Center

RAL-TL18-392 Page 8 of 9

Solitrade 2018-06-18

APPENDIX A: Extended Frequency Range Data

Specimen: Steel stud gypsum board wall, SoliBlock Wall HP+ on source side (See Full Report)

The following non-accredited data were obtained in accordance with ASTM E90-09 (2016), but extend beyond the defined frequency range of 100Hz to 5,000Hz. These unofficial results are representative of the RAL test environment only and intended for research & comparison purposes. Sampling precision observed during this procedure is reported below.

1/3 Octave Band Center Frequency (Hz)	Sound Transmission Loss (dB)	Sampling Precision (95% ±)
31.5	13	1.39
40	20	0.56
50	16	0.68
63	13	0.55
80	13	0.43
100	20	0.71
125	32	0.68
160	37	0.50
200	41	0.39
250	46	0.40
315	49	0.19
400	52	0.27
500	53	0.16
630	55	0.22
800	57	0.13
1000	60	0.14
1250	61	0.18
1600	60	0.12
2000	56	0.09
2500	55	0.10
3150	59	0.11
4000	61	0.09
5000	62	0.09
6300	64	0.10
8000	65	0.14
10000	65	0.16
12500	63	0.22



® RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2005 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104 An MALION Technical Center

RIVERBANK.ALIONSCIENCE.COM FOUNDED 1918 BY WALLACE CLEMENT SABINE

Test Report

RAL-TL18-392
Page 9 of 9

Solitrade 2018-06-18

Date

APPENDIX B: Instruments of Traceability

Specimen: Steel stud gypsum board wall, SoliBlock Wall HP+ on source side (See Full Report)

Description	Madal	Serial	Date of	Calibration
<u>Description</u>	<u>Model</u>	<u>Number</u>	Certification	<u>Due</u>
Bruel & Kjaer Pulse Analyzer -	Type 3560-C	2639093	2017-08-02	2018-08-02
System4	Jr			
Bruel & Kjaer Mic And Preamp	Type 4943-B-001	2311440	2017-09-22	2018-09-22
D	-710 10 10 10 10 10 10 10 10 10 10 10 10 1			
Bruel & Kjaer Pistonphone	Type 4228	2781248	2017-08-02	2018-08-02
EXTECH_62	SD700	A.083662	2017-11-20	2018-11-20
EXTECH_63	SD700	A.083663	2017-11-20	2018-11-20

APPENDIX C: Revisions to Original Test Report

Revision

2019-08-30	Page 1-9: The original manufacturer/requester identification and specimen
	designation were changed to facilitate a private label sales agreement. The

original requester has provided a letter to RAL on their company letterhead certifying that the product identified has not changed in materials, composition, or manufacturing methods since the original test date and the product sold under the private label agreement is exactly identical to the original specimen described in

the test report and sourced from the same manufacturing process. -EPW

END

